

# Solid Natural Strand Woven 125mm

For commercial & residential use

EST. 2004


[bambooflooringcompany.com](http://bambooflooringcompany.com)

## Key Features

- 100% renewable and sustainable Moso Bamboo monitored plantations
- FSC 100% - Bamboo sourced from managed forests
- Extremely hard and stable with excellent indentation resistance
- Easy and quick to install Uniclic® locking system
- Compatible with wet under floor heating systems

## Construction & Profile

- Strand woven bamboo with a micro bevel and Uniclic® system on all 4 sides.



**915 x 125 x 10mm (2.29m<sup>2</sup> per pack)**

## Finish

- 7 layers of Matt Bona Naturale lacquer. Coatings are water based, solvent-free and comply with European (E1) standards for off-gassing


\* Residential structural warranty  
Commercial structural 10 year warranty

| Performance             | Standard           | Result                      |
|-------------------------|--------------------|-----------------------------|
| Flammability resistance | EN 13501-1:2007    | Class Cf1-s1                |
| Hardness                | ASTM D1037 (Janka) | 3562lbf (15.8kN)            |
| Formaldehyde emissions  | EN 717-1: 2004     | 0.080mg/m <sup>3</sup> (E1) |
| Slip resistance         | EN 1339:2003       | R10                         |
| Moisture content        | -                  | 8-10%                       |
| Density                 | EN 323: 1993       | 84-0 N/mm <sup>2</sup>      |

**25**  
YEAR  
WARRANTY\*



Strand Woven Bamboo - 15.8

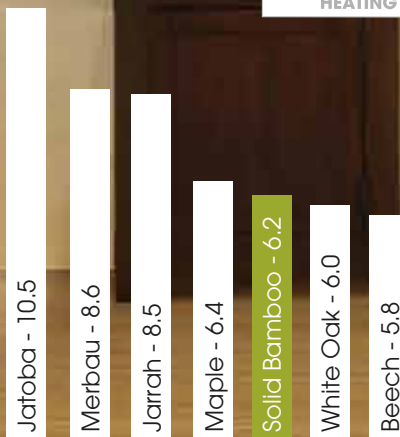

## Janka Hardness Scale

The higher the number, the harder the surface.  
All measurements are shown in kilonewtons (kN)

